


Axis AX135 Motorised Drum

General Features

- Diameter Ø135mm
- Standard length from 300mm until 1100mm
- Three-phase or single-phase motors
- Input power from 120W to 550W
- Insulation F class
- IP66 ingress protection
- Aluminium or stainless steel construction
- Permanently lubricated with synthetic oil
- Special options available
- Assembled in New Zealand



Axis AX135 Dimensions

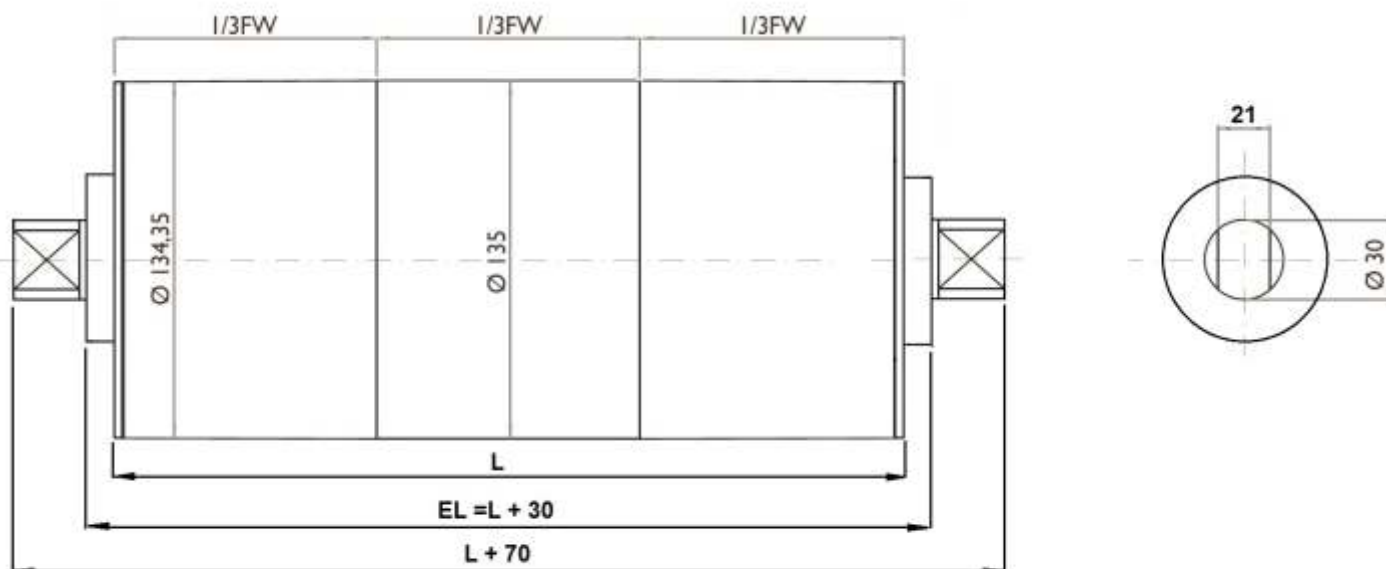

Axis AX135 Motorised Drum

Axis AX135 Specifications

Type	POWER	BELT SPEED	ROTATION SPEED	BELT PULL	TORQUE	POWER INPUT (50Hz)	DRUM LENGTH	WEIGHT
		v	n2	F	T2		L min.	L=600mm
	[kW]	[m/s]	[1/min]	[N]	[Nm]		[mm]	[kg]
AX135	0,12 4-pole	0,10	14	1200	81,0	3x230/400V 0,95/0,70 1x230V 0,92	350	11,5
		0,14	19	857	58,0			
		0,18	25	657	45,0			
AX135	0,18 4-pole	0,18	25	1000	67,5	3x230/400V 1,20/0,94 1x230V 2,30	350	11,7
		0,24	33	750	50,5			
		0,31	43	581	39,0			
AX135	0,25 4-pole	0,18	25	1389	94,0	3x230/400V 1,50/1,17 1x230V 1,70	350	12,1
		0,24	33	1042	70,0			
		0,31	43	806	54,5			
		0,36	50	694	47,0			
		0,41	57	610	41,0			
AX135	0,37 4-pole	0,24	33	1542	104	3x230/400V 1,90/1,24 1x230V 2,30	350	12,3
		0,31	43	1134	80,5			
		0,36	50	902	61,0			
		0,41	57	694	47,0			
		0,50	70	617	42,0			
		0,80	113	463	31,0			
		0,93	131	398	27,0			
		1,07	151	345	23,5			
1,25	176	295	20,0					
AX135	0,55 4-pole	0,31	43	1774	120	3x230/400V 2,80/1,80	350	12,6
		0,41	57	1341	90,5			
		0,60	70	917	62,0			
		0,80	113	688	46,5			
		0,93	131	591	40,0			
		1,07	151	514	34,5			
		1,25	176	440	29,5			

- Enquire for alternative performance data and speeds
- Indication of weight incl oil ready for operating, varies depending on construction.
- Additional weight: approx. 0,6 kg for 100mm add. length

All product details and specifications are subject to change without notice © Southquip Industrial September 2015

