


Axis AX84 Motorised Drum

General Features

- Diameter Ø84mm
- Standard length from 269mm to 1000mm
- Three-phase or single-phase motors
- 60 or 120 watt input power
- Insulation class F
- IP66 ingress protection
- Aluminium or stainless steel 304 construction
- Permanently lubricated with synthetic oil
- Axial or radial cable entry
- Special options available
- Assembled in New Zealand



Axis 84 Dimensions

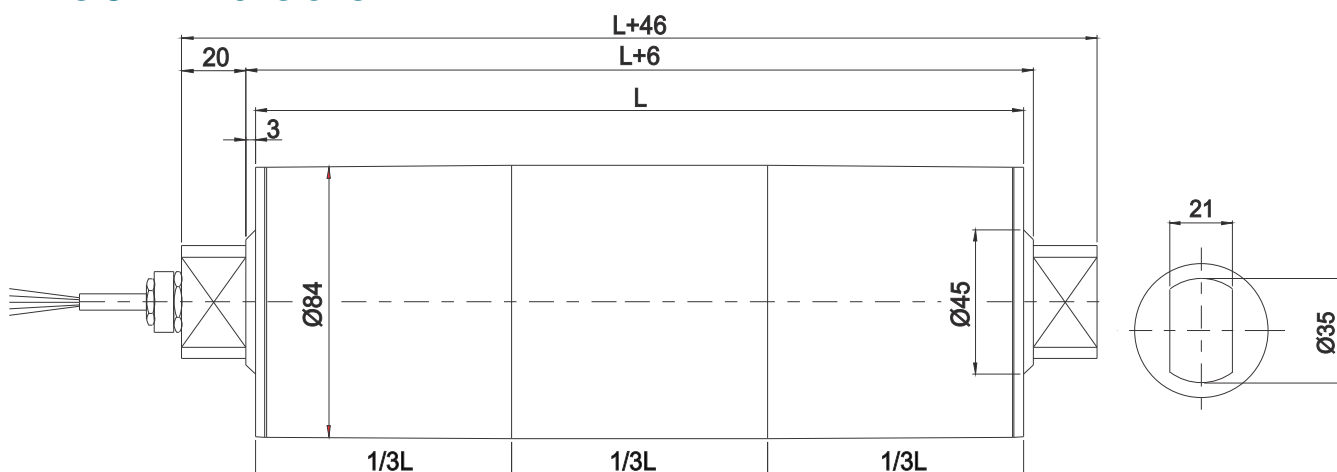

Axis 84 Specifications

Type	POWER	BELT SPEED	ROTATION SPEED	BELT PULL	TORQUE	POWER INPUT (50Hz)	DRUM LENGTH	WEIGHT
	[kW]	[m/s]	[1/min]	[N]	[Nm]		L min. [mm]	L=400mm [kg]
AX84	0,06 4-pole	0,08	80	750	31,9	3x230/400V 0,5/0,3 1x230V 0,50	269	4,8
		0,10	111	600	25,5			
		0,11	160	546	23,2			
AX84	0,12 4-pole	0,15	33	800	33,6	3x230/400V 0,50/0,30	300	4,8
		0,16	35	750	31,5			
		0,19	42	632	26,9			
		0,24	53	500	21,3			
		0,39	87	307	13,1			
		0,46	103	261	11,1			
		0,49	110	245	10,4			
		0,59	132	203	8,60			
0,77	172	156	6,60					

- Enquire for alternative performance data and speeds
- Indication of weight incl oil ready for operating
- Additional weight: approx. 0,4 kg for 100mm add. length

All product details and specifications are subject to change without notice © Southquip Industrial September 2015