



Axis AX72 Motorised Drum


General Features

- Diameter Ø72 mm
- Standard length from 250mm to 1000mm
- Three-phase or single-phase motors
- Input power from 60 W until 90 W
- Insulation class F
- IP66 ingress protection
- Zinc coated conical steel shell or stainless steel 304.
- Permanently lubricated with synthetic grease
- Axial or Radial cable entry
- Thermal protection
- CE and EN60034-1 Certified
- Assembled in New Zealand



Axis AX72 Motorised Drum

Axis 72 Dimensions

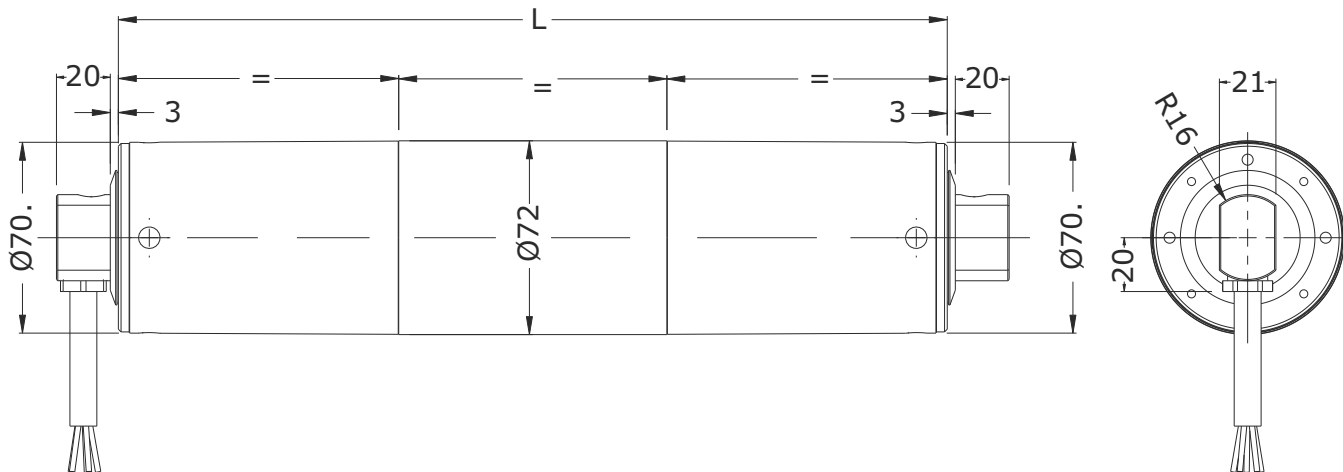

Axis 72 Specifications

Type	POWER	BELT SPEED	ROTATION SPEED	BELT PULL	TORQUE	POWER INPUT (50Hz)	DRUM LENGTH	WEIGHT
	[kW]	v	n2	F	T2		L min.	L=400mm
	[kW]	[m/s]	[1/min]	[N]	[Nm]	[A]	[mm]	[kg]
AX72	0,06 2-pole	0,30	80	52	2,30	3x230/400V 0,31/0,18 1x230V 0,27	250	4,8
		0,42	111	36	1,60			
		0,60	160	26	1,20			
		0,67	178	23	1,00			
		0,78	206	20	0,90			
AX72	0,09 2-pole	0,048	12	703	31,3	3x230/400V 0,45/0,26 1x230V 0,42	300	4,8
		0,067	17	510	22,7			
		0,083	22	410	18,2			
		0,10	26	343	15,2			
		0,11	29	304	13,5			
		0,13	34	269	12,0			
		0,14	37	243	10,8			
		0,16	42	215	9,50			
		0,175	46	192	8,60			
		0,20	53	170	7,60			
		0,30	79	123	5,50			
		0,42	111	85	3,80			
		0,60	159	61	2,70			
		0,67	177	55	2,40			
0,78	206	48	2,10					

- Enquire for alternative performance data and speeds
- Indication of weight ready for operating
- Additional weight: approx. 0,4 kg for 100mm add. length